## Connector male "Super Seal - 2 PIN"

#### ARTICLE NUMBER

With 500mm Cable	69-0190-007
With 3000mm Cable	69-0190-017
With 5000mm Cable	69-0190-027
With 10000mm Cable	69-0190-037

#### Super Seal Connector male 2 PIN with cable

#### PRODUCT FEATURES

- Fast and easy connection for LED applications
- Suitable for outdoor use due to IP6K9K protection
- Housing made of glass fiber reinforced polyamide 6.6
- With integrated silicone seals
- Temperature range -40 to +80 °C



ASPÖCK

Lum

CE RoHS IP6K9K

#### **INFORMATIVE DATA**


Maximum Current	12 A
Operating Temperature	-40 °C∼+80 °C
PIN 1	Ground <i>(white)</i>
PIN 2	+24 V (brown)

Revision: 4 \ 02/2021 \ page 1/2

# **PRODUCT INFORMATION**



### PRODUCT DRAWING

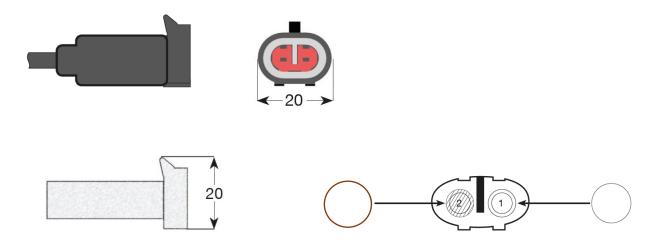

These data can have a tolerance value of -/+ 15%. Typing and printing errors reserved.

Revision: 4 \ 02/2021 \ page 2/2